


Wireless Touch Dimmer Switch

Model: WL-DS-C series


User Manual

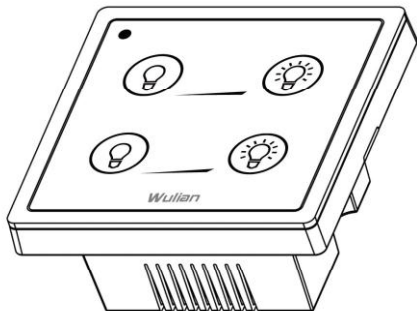

Picture is only for reference

Copyright notation

©
2012 Nanjing IOT Sensor Technology Co., Ltd All Rights Reserved.

Wulian,  is the trademark and registered trade mark of *Nanjing IOT Sensor Technology Co., Ltd.* The other products mentioned in this article or company names may be the trademark or trade name of their respective owners.

Before installing and using the products, please read user manual carefully, which will help you use the products for better.

The pictures in the manual are just for your information. If some pictures have differences with material object, the material object is final.

The content in the manual is protected by copyright law legislator. It strictly prohibits any forms of copying, passing, distributing and storing any content of the manual without prior, written, consent of the instructor of *Nanjing IOT Sensor Technology Co., Ltd.*

When using, if the practical situation of the product is different with that in the manual, or if you want to get more information, or you have any questions or ideas, please contact us as below:

I Production introduction

Wireless Touch Dimmer Switch series, based on ZigBee technology, are capable of satisfying users' expectations on different light atmosphere through remote control achieved by cellphone, tablet and some other smart mobile terminals.

Except for smart home system, this series of products can also be applied in smart building, smart hospital, smart hotel, smart

breeding etc.



(This brochure takes 2-way touch dimmer switch for example)

II Function features

Support Zigbee HA protocol



ZigBee device type : Router

Trendy yet delicate appearance

Simple installation and flexible operation

Customized according to individual preferences

III Function illustration

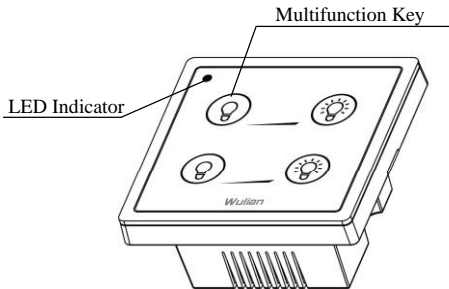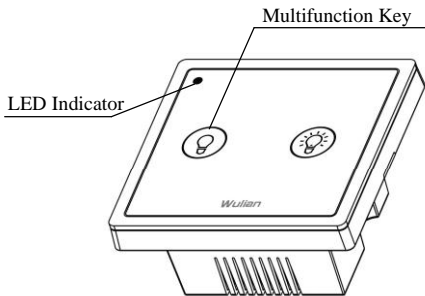

IV Installation steps


1. Connect this product with the wire of the wall box;

	1-way	2-way
PE	Protect the earth	
A	1-way output load	1-way output load
B	/	2-way output load
N	Null Line Input	
L	Live Line Input	

Note: Please make sure that the power has been turned off before installation!

Dangerous, non-professionals are prohibited operating without authorization.

-
2. Fasten the base of this product inside the wall box with 2 screws, same installation method with the ordinary wall switch;
3. Shut down the decorative cover for the final installation.

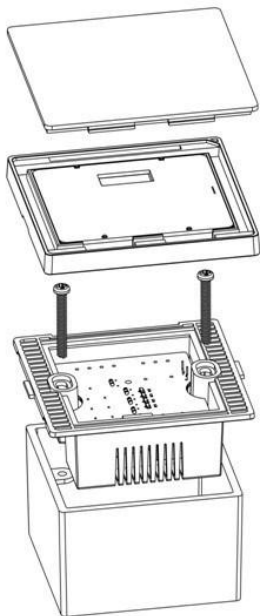

V Application methods

1. Networking Setup


- (1) It can be used just as an ordinary switch, or matched with communication gateway;



- (2) Quickly click **【multi-function key】** 4 times to join ZigBee network. LED indicator flashes when it is searching the network.


;

The single click time

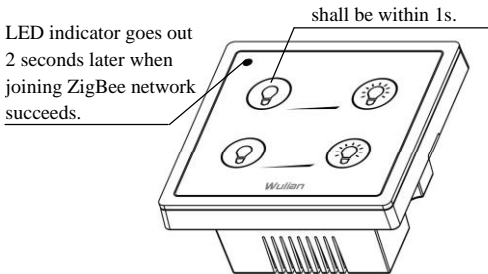

(3) Long press **【multi-function key】** for 10 seconds to restore to

factory settings.

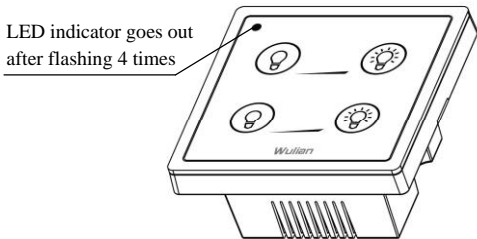

3. Software download

(1) Choose the related software according to different smart mobile terminal:

- a) Android users please search “wulian” in “Google Play Store”, selecting “Smart Home” for downloading;
- b) iPhone users please come to “APP Store” to search “smart home”, selecting “smart home” for downloading;

- c) Pad users can directly log on our official website <http://www.wulian.cc> for downloading.
- (2) Install and operate according to the indication of each version of software;
- (3) Installation completed, enter setup and usage interface;
- (4) It also supports computer operation according to users' needs. **3.**

How to use

Users can control the switch with ease via mobile terminal device and choose any scene mode. Specific operational processes see various versions of instructions.

VI Notes

Installation

If you are new to using it, please read this product instruction carefully before installation.

Cleaning

This product should be installed in a clean and dry place to avoid humidity or other material entering internal components which will influence its work. When the surface is stained with dust, dry it with soft cloth, cleaning fluid with corrosive composition and other chemical solvent are forbidden.

Storage

Those products packed in boxes should be placed in the location which is dry, free of corrosive gas and available to air. The height of pile should be no more than 10 layers. Store temperature should be between $-10^{\circ}\text{C}\sim+40^{\circ}\text{C}$ with humidity $\leq 75\%$.

Transportation

Those products packed in boxes can be transported with any kind of means, if the direct influence of rain, snow, and severe impact is avoided.

About after-sale service

Once broken, it should be send to the local maintenance station and only professional personnel can open it. Our customer service department is also available for help.

VII Product specification

Weight	250g
---------------	------

Net Weight	200g
Color	Multiple pictures and Colors available

VIII Contents within the package

Components	Quantity
Wireless Touch Dimmer Switch	1
Decorative Cover	1
Instruction	1

Screw	2
-------	---

IX Ordering information

Product(s)	Art.No.	Model
1-way Switch	WLPN1209101	WL-DS-C01
2-way Switch	WLPN1209102	WL-DS-C02

Packing Size	138×118×68mm
---------------------	--------------

Power Input	110V-250V
Type of Workload	Resistive Load: 300W per way