



SC 403

➔ Standalone RFID Time & Attendance and Access Control Terminal

Users : 30,000 Cards

Transaction Storage : 50 ,000 Logs

Reader Range : 5 - 10 cm

CPU : 32 bit Microprocessor

Communication : RS232 , RS485 , TCP/IP , USB-host

Identification speed : ≤ 2 sec

FAR : $\leq 0.0001\%$

FRR : $\leq 1\%$

Wiegand Signal : Output & Input

Access Control Interface : 3rd party electric lock ,
door sensor , exit button , open door alarm


Operating Temperature : $0^{\circ}\text{C} - 45^{\circ}\text{C}$

Operating Humidity : 20% - 80%

Power Supply : 12V , 400mA

Display : LCD Screen

Dimension (LxWxH) : 99.6 x 194 x 43 mm

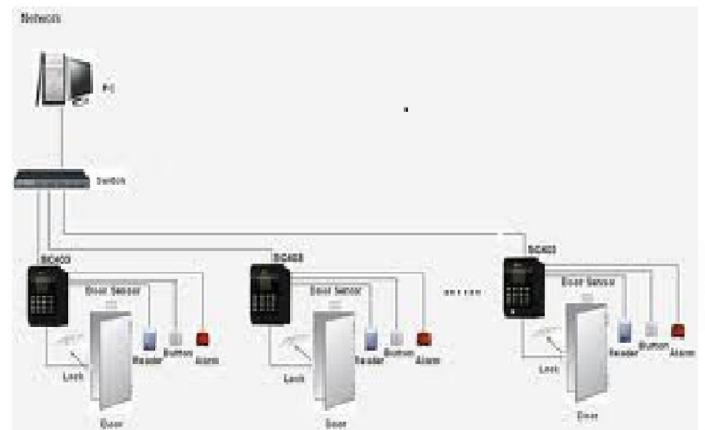

Standalone

