


SYBASE

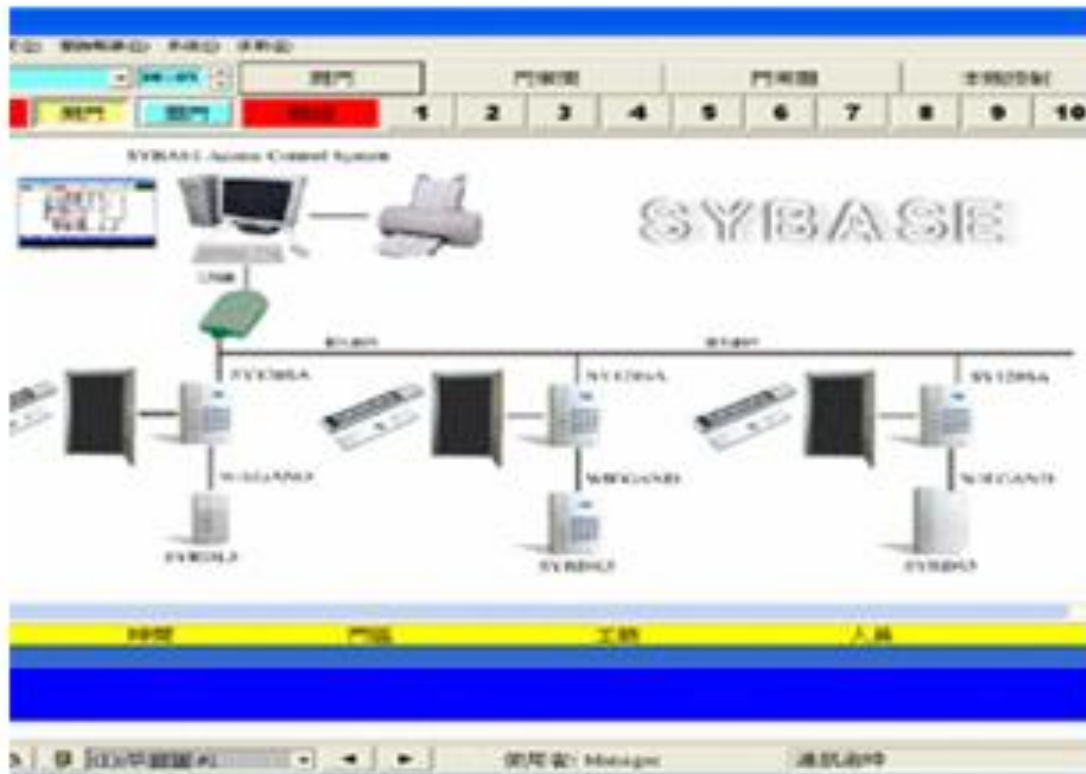

Features:

- Maximum of card : 2,000.
- Stand-alone or Network.
- Communication interface : USB
- Build-in card assignment function
- Support to data output with reports.
- Real-time E-map control.
- Automatically detect door status.
- Basic version of T&A software included.

Specifications:

Number of user	:	2000 user
Language	:	Traditional Chinese, Simplified Chinese, English
Operating system	:	Windows XP/VISTA/7
Keypro	:	MD485-USB Module
Database support	:	MS-ACCESS/MS-SQL
Network	:	Max. 999 controllers (doors)
Support	:	Electric map and forth with show door status and alarm data
Hardware	:	MD485-USB, RS485 connector type, 3 PIN terminal blocks
Buad rate	:	19,200 bps (75~1,228,800) auto
USB line length	:	1.9 m
Indicator	:	1 LED
Operating temperature	:	20 ~ 70
Power supply input	:	5V / 100 mA
Dimensions (mm)	:	46.5W x 76H x 17D
Ordering information	:	SYBASE Software