

DH-HDC-HF3200

2Megapixel 1080P HD-SDI Camera



Features

- > 1/3" 2Megapixel Exmor CMOS
- > Standard HD-SDI high definition digital interface (SMPT274/292)
- > 25/30fps@1080p, 50/60fps@720P(1280×720)
- > DWDR, Day/Night(ICR), 2DNR, AWB, Auto iris, AGC, BLC
- > OSD, AC24V/DC12V


DH-HDC-HF3200

Technical Specifications

| Model | DH-HDC-HF3200P | DH-HDC-HF3200N |
|----------------------------|--|--|
| Camera | | |
| Image Sensor | 1/3" 2Megapixe Exmor CMOS | |
| Effective Pixels | 1920(H) x1080(V) | 1920(H) x1080(V) |
| Electronic Shutter | Auto/Manual(1/3~1/10000s) | Auto/Manual(1/4~1/10000s) |
| Image Resolution | 25fps@1080p(1920×1080)/720p (1280×720); 50fps@720P(1280×720) | 30fps@1080p(1920×1080)/720p (1280×720); 60fps@720P(1280×720) |
| Min. Illumination | Color: 0.1Lux/F1.2, B/W: 0.01Lux/F1.2 | |
| S/N Ratio | > 52dB | |
| Video Output | 1Vp-p Composite Output (75Ω/BNC) | |
| HD-SDI Video Output | 1ch HD-SDI high-definition video (SMPTE 292M standard) | |
| Camera Features | | |
| OSD | English, Chinese(Simplified/Traditional) | |
| Day/Night | Auto(ICR) / Color / B/W | |
| Backlight Compensation | BLC / DWDR | |
| White Balance | Auto/ Manual | |
| Gain Control | Auto / Manual | |
| Noise Reduction | 2D | |
| Picture Adjustment | Mirror / Brightness / Contrast / Sharpness / Hue / Gain | |
| Lens | | |
| Lens Type | Manual / Auto iris (DC) | |
| Mount Type | C / CS | |
| Auxiliary Interface | | |
| RS485 | 1 Port | |
| General | | |
| Power Supply | AC24V±10% / DC12V±10% | |
| Power Consumption | Max 8.5W | |
| Working Environment | -10 °C ~+60 °C, 10%~90% | |
| Dimensions(W×D×H) | 70mm×149.5mm×63.2mm | |
| Weight | 0.65Kg | |

DH-HDC-HF3200

Dimensions (mm)

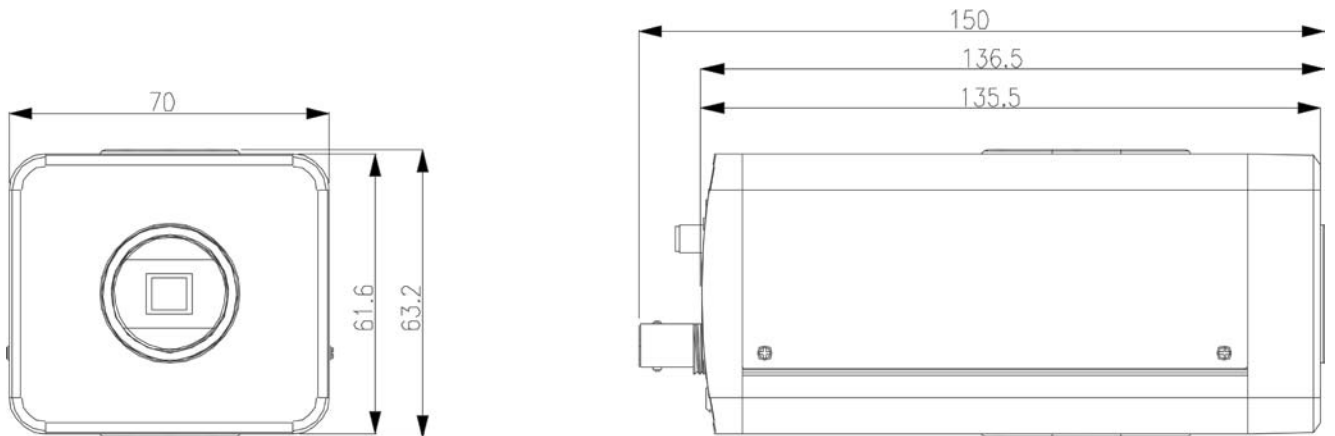

<http://www.asi.ind.in>

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.