



## DS-2CC178P-A HLC Color Camera

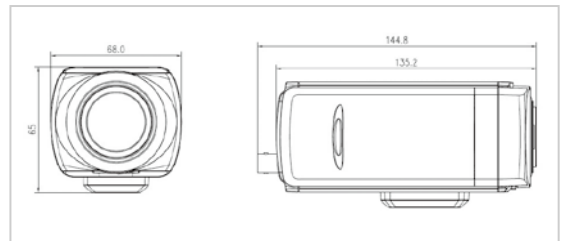

- 1/3" SONY CCD
- High Light Compensation
- Min. Illumination: 0.1 Lux@F1.2 (Color), 0.01Lux@F1.2 (B/W)
- ICR filter auto switch
- Digital Noise Reduction (DNR)
- OSD menu

Unit: mm

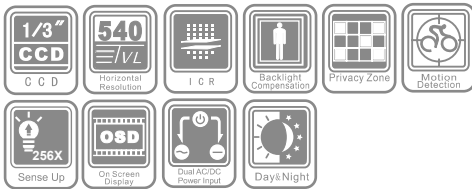

### Specifications

		DS-2CC178P-A
Camera	Image Sensor	1/3 " SONY CCD
	Effective Pixels	PAL:752(H)×582(V), NTSC:768(H)×494(V)
	Horizontal Resolution	540TVL (Color), 600TVL (B/W)
	Signal System	PAL/NTSC
	Min. Illumination (Color)	0.1Lux @ F1.2, 0.0003Lux @ (F1.2, sensitivity×256)
	Min. Illumination (B&W)	0.01Lux @ F1.2, 0.00003Lux @ (F1.2, sensitivity×256)
	Electronic Shutter	1/50(1/60)s~1/100,000s
	Day&Night	IR Cut Filter Auto Switch
	Synchronization	Internal/Power synchronization
	Video Output	1Vp-p Composite Output (75Ω/BNC)
Lens	S/N Ratio	More than 50dB
	Lens Mount	C/CS mount
Menu	Auto Iris Lens	DC/Video Drive
	Camera ID	On/Off (15 letters, fixed position)
	Auto Gain	Low/Middle/High/Off
	D/N Mode	Auto1/Auto2/Day/Night
	Auto White Balance	Auto trace WB1/Auto trace WB2/Manual/Auto
	Private Mask	On/Off, Maximum 8 Zones
	Motion Detection	Mode 1/Mode 2/Off
	BLC / HLC	BLC: Area/Intensity/Off HLC: Intensity Setting
	Flicker Proof	On/Off
	RS-485	Address/Protocol/Baud Rate
	Language	English/Chinese
	Video	Gamma Correction, Digital Zoom, Digital Noise Reduction, POS/NEG, Mirror, Resolution, Sharpness, Y, C, Pixel Correction
	General	Power Supply
Power Consumption		5W MAX (10W MAX with ICR working)
Working Temperature		-10°C~60°C(14°F~140°F)
Dimension		68×57×133.2mm (2.68"×2.24"×5.24")
	Weight	500g(1.10lbs)

### Available Models

DS-2CC178P-A