



**BE – 4714CP**  
H.264, 1.4 MP IP POE Box Camera

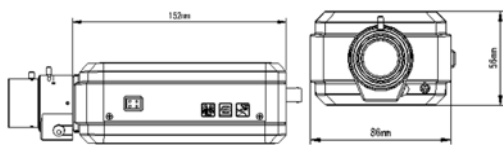

**Features :**

- 1/3” 1.4 MP Progressive Sony CMOS sensor
- H.264 Main Profile & MJPEG dual-stream
- Max 25/30fps@1.4MP (1280 x 1024)
- Digital WDR, 2D , 3D NR, AWB, AGC, BLC
- Optional “C” Mount Lens
- Multiple Network Monitoring: Web viewer, CMS, Smart phone
- Micro SD Card Slot (max 64GB),
- Built-in POE

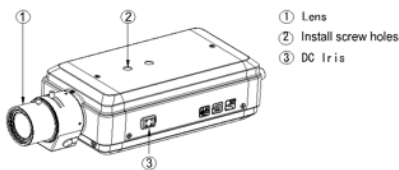

**Specifications :**

Image Sensor	1/4” 1.4 MP PS OmniVision CMOS sensor
Effective Pixels	1280 x 1024
Scanning System	Progressive
Electronics Shutter Speed	Auto( 1/25,1/30~1/10000s )
Min . Illumination	0.01Lux/F1.2 (Colour), 0.01Lux/F1.2 (B&W)
S/N Ratio	>50db
Video Output	- NO -
<b>Camera Features</b>	
Day / Night	Auto (ICR) / Color to B&W
Backlight Compensation	BLC / HLC / WDR(digital)
White Balance	Auto
Gain Control	Auto
Noise Reduction	2D , 3D
Privacy Masking	Upto 4 Areas
<b>Lens</b>	
Lens Type	C/CS-Mount
<b>Video</b>	
Compression	H.264 High Profile, Main Profile, Baseline / MJPEG
Resolution	1280x720; 640x480, 320x240, 160x112
Frame Rate	Preferred Stream : 1280x720(1~25/30fps)
	Alternate Stream : 640x 480, 320x240, 160x112 (1~25/30fps)
Bit Rate	32KB ~ 16KB Mbps , support VBR , CBR
<b>Network</b>	
Ethernet	RJ-45 (10/100Base-T)
Protocol	IPV4/IPV6, HTTP, TCP/IP, UDP, RTP, RTCP,UPNP, RTSP, SMPT, NTP, DHCP, DNS, PPPoE , DDNS, FTP
ONVIF	ONVIF Ver.2.0
Max .User Access	10 users
Smart Phone	iPhone, iPad , Android , Symbian
<b>Auxiliary Interface</b>	
Memory Slot	Micro SD, Max 64GB
<b>General</b>	
Power Supply	DC12V
Power Consumption	≤ 3W
Temperature	-20°C ~ 60°C
Dimension	152 x 86 x 56 mm
Weight	0.7Kg