

DS-2CC1192P-IRA Weather-proof Bullet Camera




Specifications

DS-2CC1192P-IRA	
Camera	
Image sensor	1/3" Sony EXVIEW HAD CCD II
Signal system	PAL
Effective pixels	976 (H) × 582 (V)
Min. illumination	0.001 lux@F1.2, AGC on, 0 lux with IR 0.0014 lux@F1.4, AGC on, 0 lux with IR
Shutter time	1/50s ~ 1/100,000s
Lens	25mm @ F1.4 (16mm optional) Angle of view: 13.5° (25mm)
Lens mount	CS mount
Day & night	Electronic
Horizontal resolution	650 TVL
Synchronization	Internal synchronization
Video output	1Vp-p composite output (75Ω / BNC)
S/N ratio	More than 62 dB
BLC	On
General	
Operating conditions	-30°C ~ 60°C (-22°F ~ 140°F) Humidity 90% or less (non-condensing)
Power supply	24 VAC ± 10% (12 VDC ± 10% Optional)
Power consumption	15W max.
Weather-proof rating	IP66
IR range	Approx. 100 ~ 110m
Dimensions	116.8 × 97.3 × 255.1mm (4.60" × 3.83" × 10.04")
Weight	2500g (5.50 lbs)

Available models


DS-2CC1192P-IRA

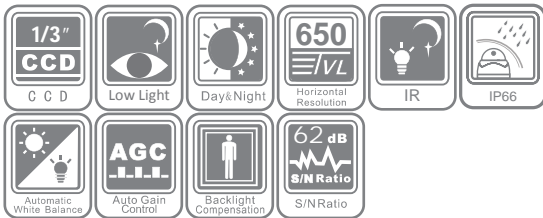

Key Features

- 1/3" Sony EXVIEW HAD CCD II
- 650 TVL high resolution
- Up to 110m IR range
- Super low illumination
- Day / night auto switch
- IP66 rating

Dimensions

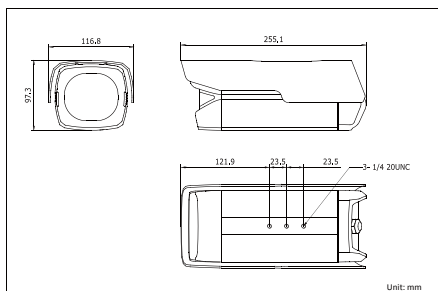

Accessories



DS-1212ZJ-S
(Indoor wall mount)



DS-1213ZJ-S
(Outdoor wall mount)