


DS-2CC5132P(N)-IR IR Weather-proof DIS Dome Camera



Specifications

DS-2CC5132P(N)-IR	
Camera	
Image sensor	1/4" DIS
Signal system	PAL / NTSC
Effective pixels	640(H) × 480(V)
Min. illumination	0.1 Lux @ (F1.2, AGC ON) 0.28 Lux @ (F2.0, AGC ON)
Shutter time	PAL: 1/25s ~ 1/15,000s NTSC: 1/30s ~ 1/15,000s
Lens	2.8mm @F1.8 (3.6mm, 6mm optional) Angle of view: 66.2° (2.8mm)
Lens mount	M12
Angle adjustment	Pan: 0 ~ 355°; Tilt: 0 ~ 75°
Day & night	IR cut filter with auto switch
Horizontal resolution	500 TVL
Synchronization	Internal synchronization
Video output	1Vp-p composite output (75 Ω / BNC)
S/N ratio	More than 52dB
General	
Operating conditions	-40°C ~ 70°C (-40°F ~ 158°F) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%
Power consumption	1W (2.5W max with IR cut filter on)
Weather-proof rating	IP66
Dimensions	Φ 89.6 × 59.1mm (Φ 3.53" × 2.33")
Weight	400g (0.88 lbs)

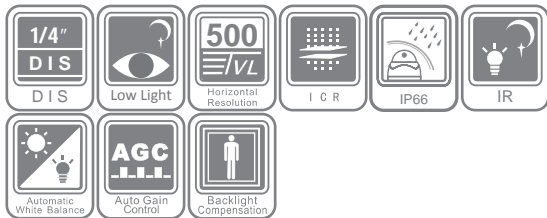


Key Features

- 1/4" DIS
- 500 TVL resolution
- 20m IR range
- Low illumination
- True day / night
- IP66 rating

Available models

DS-2CC5132P-IR, DS-2CC5132N-IR

Dimensions

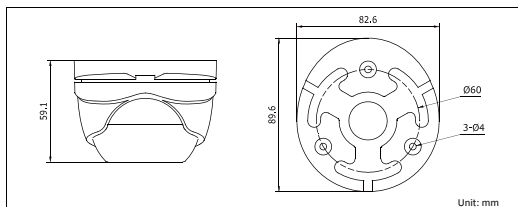

Unit: mm



GVR GROUPS
Makes Life Easy

GVR GROUPS

"Makes Life EASY"

36,1st Bharathiyar St., Sakthi Ganapathy Flat
Palavanthangal, Chennai - 114

Phone: (044)2232 3956 Mobile: 91-98403 79299

E-Mail: info@gvrgroups.com Web site: www.gvrgroups.com