




Pioneers in Securities



7" Speed Dome 36X Outdoor S-SD4-30 IR LD / S-SD6-30 IR LD / S-SD7-30 IR LD

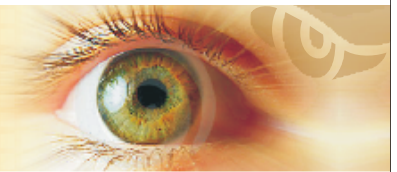

FEATURES

- 30x Optical Zoom, 10x Digital Zoom • Vector Drive and Micro-Stepping Technology make smooth rotation and accurate preset • Compound Movement make the speed dome reach preset in shortest route • 256 presets, horizontal turning speed reaches 250°/sec. • Continuous turning with no blind area • Perfect Solution for Day / Night Applications • High Sensitivity SONY EFFIOP Technology CCD Sensor • Adopt "Special Optical Low Pass Filter" • High Efficiency IR magnified LED for long distance • High Sensitivity Sensor, Excellent Picture Quality • IR Cut Filter, Auto Color & Mono Switching in low light • IP 68 with vandal proof non-reflective glass • Optional Ceiling Mount

With
Long Distance
Magnified
IR LED

Sony EFFIOP
Technology



Model	S-SD4-30 IR LD	S-SD6-30 IR LD	S-SD7-30 IR LD
Sensor	1/4" CCD Sony EFFIOP Technology		
Signal Modes	System PAL NTSC		
Resolution	480 TVL	650 TVL	750 TVL
S/N	≥ 60db (Enhanced)		
Zoom Ratio	36x Optical zoom, 10x digital zoom		
Focal Length	3.2 - 115.2 mm		
Iris	IRIS F1.6(Wide)-F4.5(Tele)		
Mini Illumination	Color : 0.01 lux , B/W : 0.2 lux Color DSS : 0.001 lux , B/W DSS : 0.0004 lux		
Day / Night	Auto / Day / Night		
Focus	Auto / Manual / Semi-Auto		
Iris Adjustment	Auto / Manual		
Shutter Speed	Auto (x128 ~ 1/50 sec. ~ 1/20,000 sec.) Auto (x128 ~ 1/60 sec. ~ 1/20,000 sec.)		
Dome Size	7 inch		
AGC	Auto / Manual		
White Balance	Auto WB /Outdoor / Indoor/One Push WB / Manual WB		
BLC/HLC	On/Off		
Flickerless	On/Off		
Brightness	Adjustable (0-96)		
Pan/Tilt	Range Horizontal: 360 °(Endless) / Vertical: 90 °		
Speed	H4°~20°/S	adjustable, V:4°~12°/S	adjustable
Preset	256 presets 4 pattern, 8 groups could be programmed		
Patrol track	4 group each can record 200 actions		
Cruise track	8 Group, every group have 30 presets can join cruise		
Other Scan	4 group support horizontal scan, frame scan, random scan		
Other functions	Auto Flip, Park Position, Power Up		
Communication	RS-485		
Protocol	Pelco-D, Pelco-P		
IR Distance	200 Mtrs. With Magnified IR LED		
Input Voltage	24 V AC • 3 Amp.		
Outdoor Standard	IP-68 Outdoor		

Designed in Japan