




QSV P33T

Professional Indoor Speed Dome Camera

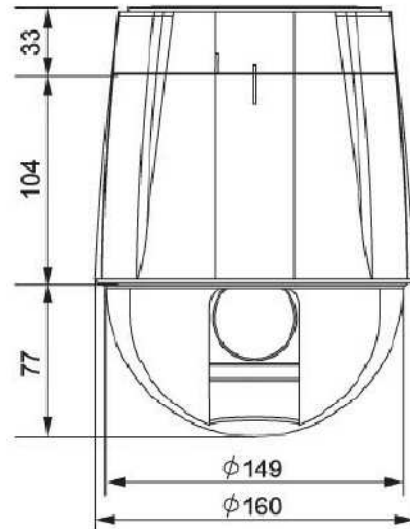

1. Fast & Silent Motion

- No Accumulative Error with Preset Function
- Shortest Path By Vector Drive Technology
- High Accuracy with Micro-Stepping Control Technology
- Smooth Motion at High Zoom Magnification Mode
- Lighting Speed (max 360⁰/Sec) & Smooth Manual Speed (MIN. 0.05⁰/Sec)
- Lowest Noise & Lowest Vibration
- Endless 360⁰/Sec Pan Rotation

2. Superior Zoom Camera

- 300x Zoom Control (Optical 30x, Digital 10x), WDR
- Day & Night (DSS)

3. Powerful Functions

- Independent Preset Characteristic Setup (AE, WB and etc)
- 128 Preset Positions with Alphanumeric Labels
- 4 Patten, 8 Swing and 8 Group Functions
- 8 Privacy Zones (Spherical Coordinates)
- Auto Flip, Auto Parking, Power-up Action
- On Screen Display On/Off
- Built-in Sensor In/Out Function (4 In / 2 Out)
- Built In Fan & Heater / IP 66 Weatherproof
- Small size, Vandal Proof (Dome Cover: PC Housing & Accessories: AL)

www.markglobal.in

Specification :

Model	QSV-P33T	
Signal System	PAL	
Camera	Image Device	¼ " SONY Interline Transfer
	Effective Pixels	752[H],582[V],440 K
	H.Resolution	520 TVL (Day)/570TVL (Night)
	S/N Ratio	More than 50 dB
	Zoom	30x Optical,X10 Digital
	Focal Length	F 1.6~3.2,f=3.3~99mm
	Min.Illumination	Day :0.4 Lux /Night :0.08 LUX
	Day & Night	Auto/Day/Night(ICR)
	WDR	YES
	Focus	Auto/Manual/Semi-Auto
	AE Mode	Auto/Iris/Shutter/Manual
	White Balance	Auto/Manual(Red, Blue Gain Adjustable)
	BLC	On/Off
	Flicker less	On/Off
Brightness	Adjustable	

Mechanical Specification :

Model	QSV-****	
Pan / Tilt	Range	Pan 360 ⁰ (Endless)/Tilt 95 ⁰
	Pan/Tilt Speed	Preset : 360 ⁰ /Sec
		Manual : 0.05~360 ⁰ /Sec(Zoom Proportional)
		Swing : 1~180 ⁰ / Sec
	Preset	128 Preset with Labels
	Pattern	4 Patterns (Approx,5 minutes for each Pattern)
	Swing	8 Swings
	Group	8 Groups (Max.20 entries for each Pattern)
Other Func.	Auto Flip, Auto Parking, Power-up, Action & etc	
General	Communication	Rs-485
	Protocol	Pelco-D, Pelco-P selectable
	Privacy Zone **	8 Zones
	Sensor In/Out	Built –in 4 Input/2 Output
	OSD	English on/off
	Fan/Heater	Built-in
	Power	AC Type : AC 24 V/0.6A
		DC Type : DC 12 V/1.0A
	Dimension	Dome : Ø149 mm / 15.9*
		Housing : 160(Ø)X212(H)mm/6.3*(Ø)8.3*(H)
Weight	Approx. 2 kg/4.4 Lbs	
Operating Temp.	0~40 ⁰ C/32~104 ⁰ F	