

DH-DVR5104/5108/5116/2116

4/8/16CH Full D1 1U Home-use Standalone DVR



DH-DVR5104/5108/5116



DH-DVR2116

DH-DVR5104/5108/5116/2116

Features

- > Up to 4/8/16 cameras with 1080p realtime preview
- > H.264 dual-stream video compression
- > DVR5104/5108/5116: All channel D1(4CIF) realtime recording
- > DVR2116: 2CIF realtime recording
- > VGA / TV simultaneous video output
- > All channel synchronous realtime playback, GRID interface & smart search
- > Support 1 SATA HDD up to 4TB, 2 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

DH-DVR5104/5108/5116/2116

Technical Specifications

Model		DH-DVR5104	DH-DVR5108	DH-DVR5116	DH-DVR2116
System					
Main Processor		Embedded processor			
Operating System		Embedded LINUX			
Video					
Input		4 channel, BNC	8 channel, BNC	16 channel, BNC	16 channel, BNC
Standard		NTSC(525Line, 60f/s), PAL(625Line, 50f/s)			
Display					
Interface		1 VGA, 1 TV, BNC			
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768			
Display Split		1/4	1/4/8/9	1/4/8/9/16	1/4/8/9/16
Privacy Masking		4 rectangular zones (each camera)			
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording			
Recording					
Video/Audio Compression		H.264 / G.711			
Resolution		D1/4CIF(704×576/704×480) 2CIF(704×288/704×240)/ CIF(352×288/352×240) / QCIF(176×144/176×120)			
Record Rate	Main Stream:	D1(1~25/30fps)			2CIF(1~25/30fps)/2ch@D1+14ch@CIF(1~25/30fps)
	Extra Stream	CIF/QCIF(1~25/30ps)			CIF(1~6/7fps)/QCIF(1~25/30ps)
Bit Rate		48~4096Kb/s			
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop			
Record Interval		1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec			
Video Detection					
Trigger Events		Recording, Tour, Video Push, Email, FTP, Buzzer & Screen tips			
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank			
Playback & Backup					
Sync Playback		1/4	1/4/9	1/4/9/16	1/4/9/16
Search Mode		Time/Date, MD & Exact search (accurate to second)			


DH-DVR5104/5108/5116/2116

Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device / Network
Network	
Ethernet	RJ-45 port (10/100M)
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	

DH-DVR5104/5108/5116/2116

Internal HDD	1 SATA port, up to 4TB	
Auxiliary Interface		
USB Interface	2 ports (1 Rear), USB2.0	
General		
Power Supply	DC12V/2A	
Power Consumption	10W(without HDD)	
Working Environment	-10 ~ +55°C / 10~90%RH / 86~106kpa	
Dimension(W×D×H)	205mm×205mm	270mm×205mm×40mm
Weight	0.5KG	

System Connection

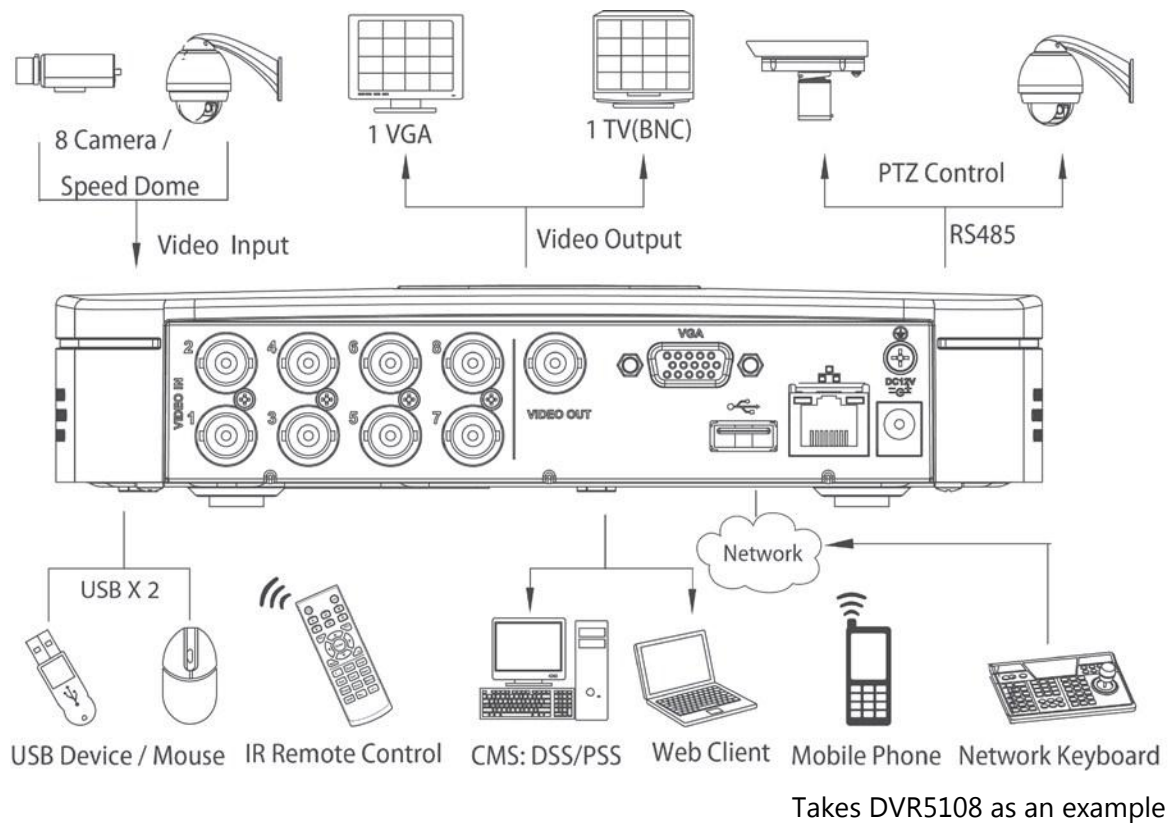

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China Tel:
+86-571-87688883



DH-DVR5104/5108/5116/2116

Fax: +86-571-87688815 Email:

overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.