



SAMSUNG

# Matching your requirements. General purpose digital recording solution



## 16CH H.264 Digital Video Recorder

# SRD-1630/1630D/1630DC

Forming part of the SRD series of Digital Video Recorders (DVRs), the SRD-1630 range provides users with an general purpose 16 channel recording solution that has been designed to perfectly match the functionality and budget requirements for a host of professional security applications. Providing real-time live view and higher selectable recording rates across all channels, users are able to record at higher frame rates than the entry-level SRD-1610 range; up to 240/200 (NTSC/PAL) fps at CIF resolution, 120/100 fps at 2-CIF resolution and 60/50 fps at 4-CIF resolution. Besides its flexible recording capacity, like all SRD series DVRs the SRD-1630 range utilises Samsung's high level H.264 compression to ensure superb quality, whilst minimising hard drive space and bandwidth requirements. Options include a built-in DVD drive (SRD-1630D) and coaxial control compatibility (SRD-1630DC).

- Up to 240 (NTSC) / 200 (PAL)fps recording rate
- Up to 4ch audio inputs and 1ch audio outputs
- SRD-1630 : Max. 6 internal HDD (HDD x 6)  
SRD-1630D(C) : Max. 5 internal HDD (HDD x 5)
- SRD-1630D(C) : DVD-RW backup support
- SRD-1630DC : PTZ control via coaxial cable
- Video (H.264) / Audio (ADPCM)

# 16CH H.264 Digital Video Recorder

# SRD-1630/1630D/1630DC




## Specifications

	SRD-1630	SRD-1630D	SRD-1630DC
<b>DISPLAY</b>			
Video	Inputs	16 composite video 0.5-1 Vpp, 75 ohm automatic termination	
	Resolution	NTSC : 704 x 480 / PAL : 704 x 576	
	Frame Rate	NTSC : 480fps / PAL : 400fps	
Live	Resolution	NTSC : 704 x 480 / PAL : 704 x 576	
	Multi Screen Display	1 / 4 / 6 / 8 / 9 / 13 / 16 / PIP	
<b>PERFORMANCE</b>			
Operating System	Embedded	Linux	
	Compression	H.264	
Recording	Record Rate	NTSC : Up to 60fps@704 x 480 / PAL : Up to 50fps@704 x 576 NTSC : Up to 120fps@704 x 240 / PAL : Up to 100fps@704 x 288 NTSC : Up to 240fps@352 x 240 / PAL : Up to 200fps@352 x 288	
	Mode	NTSC : Manual, Schedule (Continuous / Event), Event (Pre / Post), Time lapse (0.9 / 1.9 / 3.8 / 7.5 / 15 / 30fps) PAL : Manual, Schedule (Continuous / Event), Event (Pre / Post), Time lapse (0.8 / 1.6 / 3.1 / 6.2 / 12.5 / 25fps)	
	Overwrite Modes	Continuous	
	Pre-alarm	Up to 30sec (5, 10, 20, 30sec)	
Search & Playback	Post-alarm	Up to 6hour (5,10, 20, 30sec, 1, 3, 5, 10, 20min, 1, 2, 3, 4, 5, 6hour)	
	Search Mode	Date/Time, Event, Back up, Pos, Motion (*All search mode include preview function)	
	Playback Function	Fast forward / backward, Slow forward / backward, Step forward / backward	
Network	Transmission Speed	Up to 4Mbps, Unlimited 4M / 2 / 1.5 / 1Mbps / 800 / 600 / 500 / 400 / 300 / 200 / 100 / 50kbps	
	Bandwidth Control	Automatic	
	Stream	H.264 (4CIF / 2CIF / CIF selectable)	
Storage	Max. Remote Users	Search 3 / Live unicast 10 / Live multicast 20	
	Protocol Support	TCP/IP, DHCP, PPPoE, SMTP, NTP, HTTP, DDNS, RTP, RTSP	
	Monitoring	Net-i viewer, Smart viewer, Web viewer	
	Internal HDD	Up to 6 SATA HDDs	Up to 5 SATA HDDs
Security	DVD Writer (Back up)	N/A	Yes
	USB (Back up)	3 USB ports	
	File Format (Back up)	AVI, MDB (DVR play back), EXE (Include player)	
INTERFACE	Password Protection	1 Admin, 10 group, 20 user per 1 group, User can be assigned authority for function	
	Data Authentication	Watermark	
Monitors	VGA	Analog RGB 800 x 600, 1024 x 768, 1280 x 1024 resolution	
	Main Composite	BNC, 1.0 Vp-p, 75 ohm	
	Spot Composite	1 BNC, 1.0 Vp-p, 75 ohm, Support multi screen and camera title	
	Loop Outputs	16	
Audio	Inputs/Output	4 Line in / 1 Line out	
	Compression	ADPCM	
	Sampling rate	16KHz	
Alarm	Inputs / Outputs	Terminal 16 inputs (NO/NC) / Terminal 4 relay outputs (NO/NC), Rating : 30V DC/2A, 125V AC/0.5A	
	Remote notification	Notification via e-mail	
	Ethernet	1 RJ-45 10/100/1000 Base-T	
Connections	Serial interface	RS-232/RS-485 for PTZ, System keyboard	
	USB	USB 2.0, 3 ports	
	Application Support	Mouse, Remote controller	
	Protocol support	Samsung-T/E, Pelco-D/P, Panasonic, Phillips, AD, DIAMOND, ERNA, KALATEL, VCL TP, Vicom * SRD-1630DC : PTZ Control via Coaxial Cable (Samsung CCVC, Pelco-C (Coaxitron))	
<b>GENERAL</b>			
Electrical	Input Voltage/Current	100 to 240V AC $\pm$ 10%, 50/60Hz, Auto ranging	
	Power consumption	Max. 35W (With 1x HDD)	
Environmental	Operating Temperature/Humidity	+0°C ~ +40°C (+32°F ~ +104°F) / 20% ~ 85% RH	
	Dimension (W x H x D)	440 x 88 x 430mm (17.32" x 3.46" x 16.93")	
Mechanical	Weight (With hard disks)	Approx. 7.3Kg (16.09 lb)	
	Rack mount kit	2ea	
Language	Korean, Japanese, Chinese, English, French, German, Spanish, Italian, Russian, Polish, Czech, Turkish, Netherlands, Portuguese, Swedish, Danish, Thailandais, Rumanian, Serbian, Croatian, Hungarian, Greek (22 Language)		

## Dimensions

Unit : mm (inch)

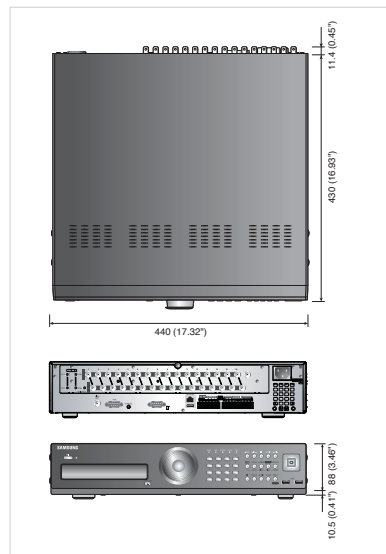

The Eco mark represents Samsung Technwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.

■ DISTRIBUTED BY



[www.asi.ind.in](http://www.asi.ind.in)



### SAMSUNG TECHWIN CO., LTD.

701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400  
Tel : +82-70-7147-8741-8749, 8752-8760 Fax : +82-31-8018-3745  
[www.samsungsecurity.com](http://www.samsungsecurity.com) [www.samsungcctv.com](http://www.samsungcctv.com)

**SAMSUNG TECHWIN AMERICA INC.**  
1480 Charles Willard St, Carson, CA 90746, UNITED STATES  
Toll Free : +1-877-213-1222 Fax : +1-310-632-2195  
[www.samsungcctvusa.com](http://www.samsungcctvusa.com)

**SAMSUNG TECHWIN EUROPE LTD.**  
Samsung House, 1000 Hillwood Drive, Hillwood Business Park  
Chertsey, Surrey, UNITED KINGDOM KT16 0PS  
Tel : +44-1932-45-5300 Fax : +44-1932-45-5325

**TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD.**  
No.11 Wei 6 Street, Micro-Electronic Industrial Park  
Jingang Road, Tianjin, P.R. CHINA 300385  
Tel : +86-22-23887788 Fax : +86-22-23887788