

DH-NVR3404V-P/3408V-P/3416V-P

4/8/16 Channel 4HDD PoE Vertical Network Video Recorder



Features

- > Up to 4/8/16 channel with 1080p realtime live view
- > H.264/MJPEG dual codec decoding
- > Max 120fps@1080p, 240fps@720p,480fps@D1 preview & recording
- > All channel simultaneous realtime playback, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotech and etc.
- > ONVIF Version 2.0 conformance
- > 3D intelligent positioning with Dahua PTZ camera
- > Support 4 SATA HDDs up to 16TB, 1 eSATA up to 16TB, 3 USB2.0
- > Support IPC UPnP, 4 PoE ports
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

DH-NVR3404V-P/3408V-P/3416V-P


Technical Specifications

Model	DH-NVR3404V-P	DH-NVR3408V-P	DH-NVR3416V-P
System			
Main Processor	Dual-core embedded processor		
Operating System	Embedded LINUX		
Video & Audio			
IP Camera Input	4 channel	8 channel	16 channel
Two-way Talk	1 channel Input, 1 channel Output, RCA		
Display			
Interface	1 HDMI, 1 VGA		
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768		
Display Split	1/4	1/4/8/9	1/4/8/9/16
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
Recording			
Compression	H.264 / MJPEG		
Resolution	1080P(1920×1080) / 720P(1280×720) / D1 (704×576/704×480)		
Record Rate	400/480fps@D1, 200/240fps@720P , 100/120fps@1080P		
Bit Rate	48 ~ 8192kbps		
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop		
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
Video Detection & Alarm			
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Spot, Buzzer & Screen tips		
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Alarm Input	3 channel		
Relay Output	1 channel		
Playback & Backup			
Sync Playback	1/4	1/4/9	1/4/9/16
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search		
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom		
Backup Mode	USB Device / eSATA Device / Network		
Network			
Ethernet	RJ-45 port (10/100M/1000M)		
PoE	4 ports (IEEE802.3af)		
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS etc)		
Max. User Access	20 users		
Smart Phone	iPhone, iPad, Android, Windows Phone		
Storage			
Internal HDD	4 SATA ports, up to 16TB		

DH-NVR3404V-P/3408V-P/3416V-P

External HDD	1 eSATA port (Max 4 SATA HDDs), up to 16TB
Auxiliary Interface	
USB Interface	3ports (1 Rear), USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port, For PTZ control
General	
Power Supply	NVR: DC12V
	PoE Switch: DC48V
Power Consumption	NVR: 20W(without HDD)
	PoE Port: Max.15 (each)
Working Environment	-10 ~ +55°C / 10~90%RH / 86~106kpa
Dimension (W×D×H)	157.5mm×220mm ×172mm
Weight	2.6KG(without HDD)

System Connection

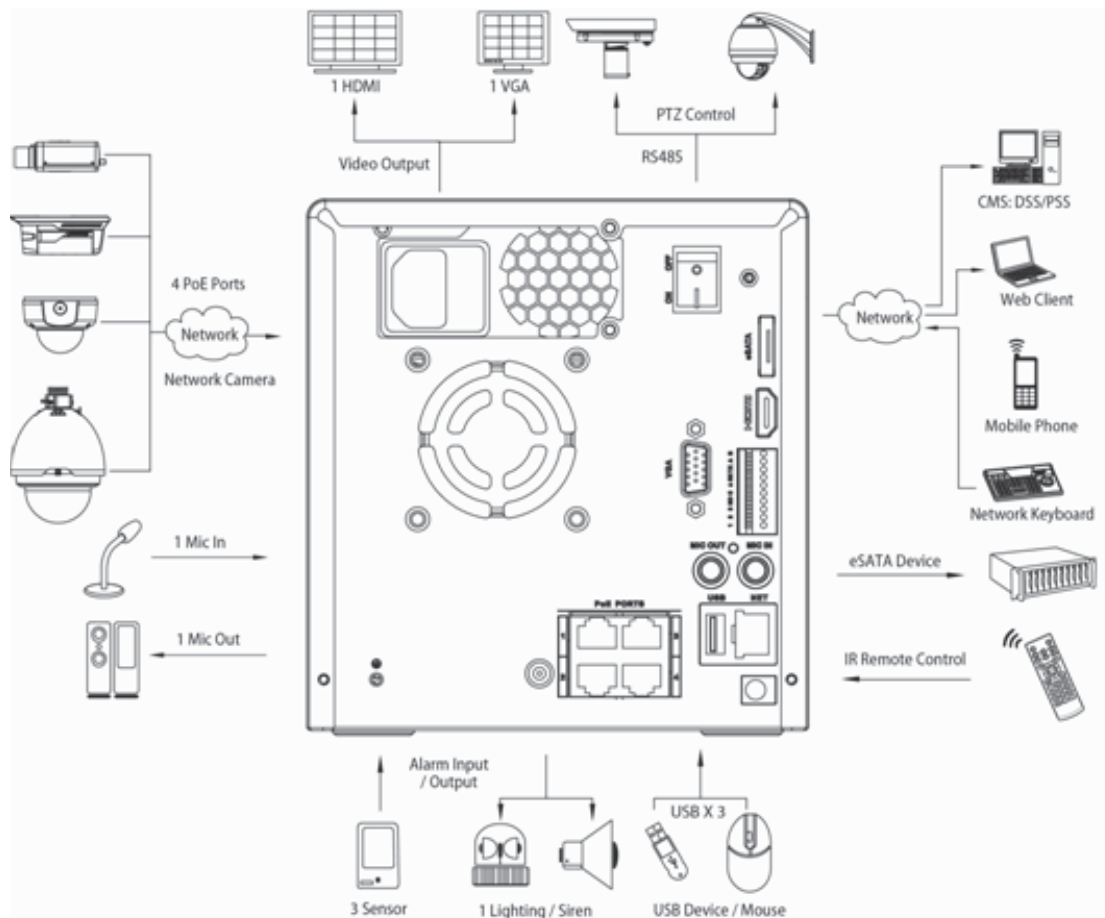

* Take NVR3416V-P as an example

DH-NVR3404V-P/3408V-P/3416V-P

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.