


## DS-7604NI-S Embedded NVR



### Key Features

- Support local storage at H.264 compression
- Support 4 network cameras input at 4CIF resolution or 2 network cameras input at UXGA/720P resolution
- Up to 4-ch synchronous playback
- 4X digital zoom in preview and playback
- Advanced motion detection
- Easy back-up to USB and CD/DVD-RW

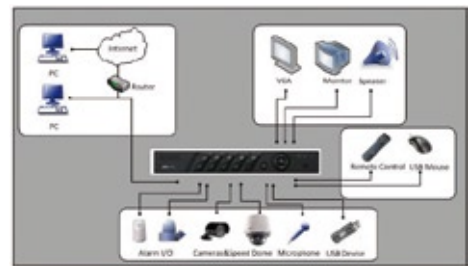

### Specifications

		DS-7604NI-S
	IP video input	4-ch 4CIF/2-ch 720P/2-ch UXGA IP camera/dome
	Audio compression	OggVorbis
	Audio input	1-ch, RCA (2.0Vp-p, 1kΩ)
	Voice talk input	1-ch, using audio input
Video/Audio output	Preview resolution	PAL: 704×576; NTSC: 704×480
	VGA output	1, resolution: 1024×768/60Hz
	Recording resolution	UXGA/720P/4CIF/DCIF/2CIF/CIF/QCIF
	Video output	1-ch, BNC(1.0Vp-p, 75Ω)
	Frame rate	720P: 25(P)/30(N)
	Video bit rate	32Kbps~2Mbps, or user-defined (Max. 8Mbps)
	Audio output	1-ch, RCA (Linear electrical level, 600Ω)
	Audio bit rate	16kbps
	Synchronous playback	4-ch
	Dual streams	Yes
Hard disk driver	Interface type	1 SATA interface
	Capacity	Each interface supports up to 2TB capacity
External interface	Network interface	1, RJ45 10M/100M adaptive Ethernet interface
	Serial interface	1 RS-485 interface (for PTZ control)
	USB interface	2, USB2.0
	Alarm input	4-ch
	Alarm output	1-ch
General	Power supply	12V DC
	Consumption	≤20W(without hard disk)
	Working temperature	-10°C~+55°C(14°F~131°F)
	Working humidity	10%~90%
	Dimension	315mm(W)×44.5mm(H)×230mm(D)(12.40"(W)×1.75"(H)×9.06"(D))
	Weight(without HDD)	≤2500g(5.51lbs)