

SAMSUNG

iPOLiS

## Simultaneous 64/32 Channel Network Recording



32CH/64CH Network Video Recorder

## SRN-3250/6450

The SRN-3250/6450 is a high-quality, high performance network-based video recorder supporting up to 32/64 network streams. The NVR features real-time recording capability at 30fps, CIF resolution and assures users do not miss any moment. Also, it utilises H.264, MPEG-4 and MJPEG codec and enables to select proper codec that meets users' need.

- Real-time H.264/MPEG-4/MJPEG triple codec
- 960(800)fps real-time recording at CIF (SRN-3250)  
1920(1600)fps real time recording at CIF (SRN-6450)
- Large-sized default HDD with 1TB data capacity
- Supports multiple video streaming
- Optimal quality for real-time network monitoring

## 32CH/64CH Network Video Recorder

# SRN-3250/6450



### Specifications


		SRN-6450	SRN-3250	
<b>DISPLAY</b>				
N/W Camera	Inputs	Up to 64CH (CIF 1,920/1,600fps)	Up to 32CH (CIF 960/800fps)	
	Resolution	VGA, 4CIF, 1.3M	VGA, 4CIF, 1.3M	
Web Support	Live	1/4/9/16/36/64, Sequence	1/4/9/16/32, Sequence	
	Search	1 CH		
<b>PERFORMANCE</b>				
Recording	Compression	H.264, MPEG-4, M-JPEG		
	Recording bit rate	48Mbps(*1)	36Mbps(*1)	
	Record Rate (NTSC/PAL)	Up to 320fps @ 1.3MP	Up to 120fps @ 1.3MP	
		Up to 1,280/1,152fps @4CIF	Up to 480/400fps @4CIF	
		Up to 1,920/1,600fps @2CIF, CIF	Up to 960/800fps @2CIF, CIF	
	Mode	Manual, Schedule (Normal / Event)		
Search & Playback	Overwrite modes	Continuous		
	Pre-alarm	Up to 5sec		
	Post-alarm	Up to 60sec		
Search & Playback	Search Mode	Time, Event, Calendar		
	Playback Function	REW, FWD (Depend on CMS)		
Network	Bandwidth Control	Automatic (Automatic Transmission Control)		
	Max. Remote Users	5 Users simultaneously		
	Protocol Support	TCP/IP, DHCP, DNS, DDNS, HTTP, ARP, ICMP, NTP, RTP/RTCP, RTSP		
	Monitoring	CMS Software Net-1, Built-in web server		
Storage	Maximum Capacity	Up to 20TB using external storage option		
	RAID	Normal, RAID1, 5	Normal, RAID1	
	Internal HDD	Up to 4 SATA HDDs		
	External HDD	Up to 4 expansion bay (up to 4 HDD each)		
Storage	NAS	Up to 4 NAS connection (CIFS/Samba)		
	Security	Password Protection		
		2 User Level		
<b>INTERFACE</b>				
Monitors	Monitors	DOT Matrix LCD		
		20 x 2 status display		
Alarm	Inputs	Screw terminal 2 inputs, NO/NC		
	Outputs	Screw terminal 2 relay outputs, NO/NC		
	Remote Notification	Notification via e-mail		
Connections	Ethernet	3 (RJ-45 10/100/1000 Base-T), 1 (RJ-45 100Base-T)		
	Serial Interface	RS-232C		
	USB	2 USB 2.0 ports (Firmware upgrade)		
	eSATA	4 External SATA ports		
IP Camera Protocols	Supported IP Cameras	Samsung, AXIS(*2)		
<b>GENERAL</b>				
Electrical	Input Voltage	100 - 240V AC ±10%, 50/60 Hz, Auto ranging		
	Power Consumption	Max. 110W (with 1X HDD) Max. 130W (with 4X HDD)		
Environmental	Operating Temperature	+5°C ~ +40°C (+41°F ~ +104°F)		
	Humidity	0% ~ 60%RH		
Mechanical	Dimensions (WxHxD)	430 x 88 x 501mm (16.92" x 3.46" x 19.73")		
	Weight (4X Hard Disks)	Approx. 11Kg (24.25 lb)		
Screen Size	Rack Mount Kit	For mounting one unit in an EIA 19 inch rack		
Language (LCD)		English		
Certification		FCC (Class A), cUL/UL listed, CE (Class A)		

(\*1) Up to 5Mbps for each camera

(\*2) VAPIX MPEG4 Model, Some functions are limited

### Dimensions

Unit : mm (inch)

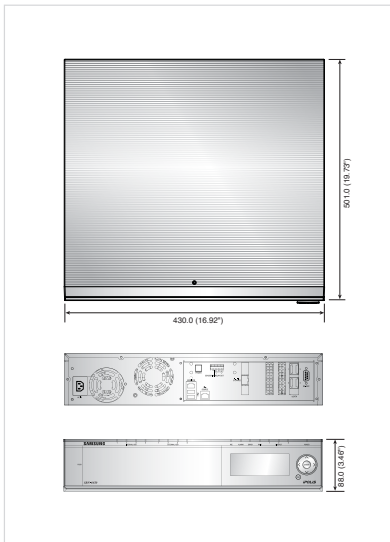

The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.



#### SAMSUNG TECHWIN CO., LTD.

701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400  
Tel : +82-70-7147-8741~8749, 8752-8760 Fax : +82-31-8018-3745  
www.samsungsecurity.com www.samsungcctv.com

#### SAMSUNG TECHWIN AMERICA Inc.

100 Challenger Rd, Suite 700 Ridgely Park, NJ 07660  
Tel: Free: +1-877-213-1222 Direct: +1-201-325-6920  
Fax: +1-201-373-0124  
www.samsungcctvusa.com

#### SAMSUNG TECHWIN EUROPE LTD.

Samsung House, 1000 Hillwood Drive, Hillwood Business Park  
Chertsey, Surrey, UNITED KINGDOM KT16 0PS  
Tel: +44-1932-45-5300 Fax: +44-1932-45-5325

#### TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD.

No. 11 Wei 6 Street, Micro-Electronic Industrial Park  
Jingang Road, Tianjin, P.R. CHINA 300395  
Tel: +86-22-23887788 Fax: +86-22-23887788

■ DISTRIBUTED BY



[www.asi.ind.in](http://www.asi.ind.in)