



THE COMPLETE SURVEILLANCE SYSTEM

## KEYBOARD CONTROLLER

## CPT-FTD2404CZ

This full function, desktop keyboard controller will allow you to configure a variety of security solutions to meet most applications. The CPT-FTD2404CZ is flexible and can be used in conjunction with the Capture Fastrax II dome series, OmniScape, multiplexers and digital video recorders.

The CPT-FTD2404CZ keyboard is laid-out with an ergonomic design for efficient operation. A barrel-type joystick provides precise, simple one-handed operation of the pan and tilt control while simultaneously operating the zoom lens by twisting the barrel to the left or right.

All component control data is transmitted via RS-485 or RS-232. Two keyboards can also be configured into a system if more than one operator is required. System operation and keyboard programming is easily achieved with the two-line LCD display.



ERGONOMIC DESIGN

TWO-LINE  
LCD DISPLAY

THREE-AXIS  
JOYSTICK

### FEATURES

- ▶ Program up to 240 preset positions per dome
- ▶ Auto-iris with manual override control
- ▶ Auto-focus with manual override control
- ▶ Three-axis joystick
- ▶ Eight tours consisting of preset, pattern and autoscan per dome
- ▶ Global preset recalls specified preset of all dome cameras
- ▶ Specific multiplexers (max 255) and DVR (max 99) can be controlled remotely
- ▶ One master and one slave keyboard are supported
- ▶ Three-year warranty






THE COMPLETE SURVEILLANCE SYSTEM

KEYBOARD CONTROLLER

CPT-FTD2404CZ

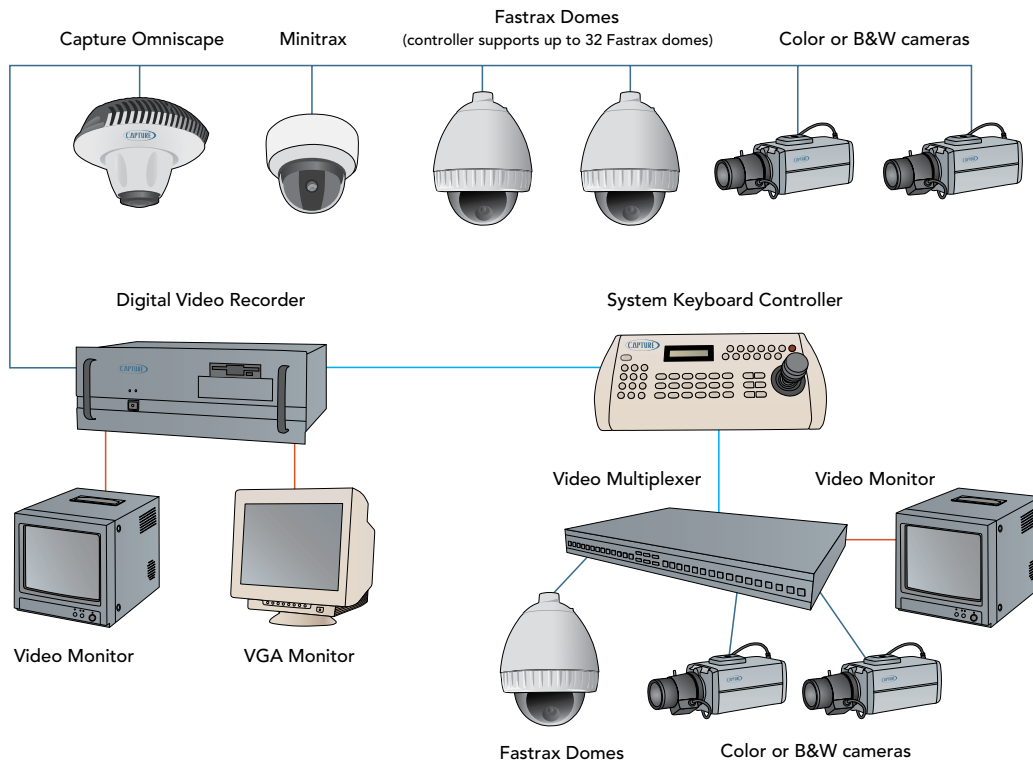

**TECHNICAL SPECIFICATIONS**

<b>Communication Connections</b>	Dome: Max 32 Multiplexer: Max 255 DVR: Max 99
<b>Control Method</b>	RS-485, RS-232C
<b>Baud Rates</b>	2400 ~ 230K bps
<b>Operating Temperature</b>	32° F to 122° F; 0° C to 50° C

<b>Storage Temperature</b>	-40° F to 122° F; -20° C to 60° C
<b>Humidity</b>	0 to 90% RH (non-condensing)
<b>Power Consumption</b>	12 VDC, 0.5 watts, power supply included
<b>Dimensions (W x H x D)</b>	15 x 3.8 x 6.6 inches; 380 x 96 x 168 mm
<b>Weight</b>	2.65 lbs; 1.2 kg