


CP- UNP-2013S

1.3MP HD IP PTZ Camera

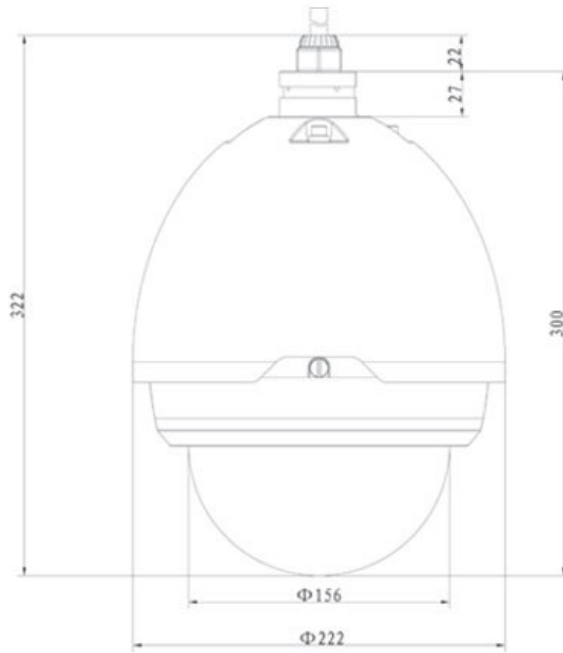

Main Features

- 1/3" CMOS Image sensor
- Powerful 20x Optical and 16x Digital zoom
- Max 25/30fps@1.3MP Resolution
- DWDR, Day/Night(ICR), Ultra DNR
- Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
- Max 300°/s pan speed, 360° endless pan rotation
- Built-in 2/1 alarm in/out, IP66
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UNP-2013S

1.3MP HD IP PTZ Camera

Feature

Image Sensor
 Effective Pixels
 Video Output
 S/N Ratio
 Minimum Illumination
 Focal Length
 Focus Control
 White Balance
 Close Focus Distance
 Angle of View
 Electronic Shutter
 AGC control
 Back Light Compensation
 Optical Zoom
 Digital Zoom
 Pan Travel
 Tilt Travel
 Presets
 Preset Speed
 Special Features
 Privacy Masking
 Power up Action
 Time Task
 Idle Motion
 Day/Night: IR Cut Filter
 Video Compression
 Video Streaming
 Audio Compression
 Audio Streaming

 Protocols

Specification

1/3" CMOS
 1280(H) x 960(V)
 BNC(1.0Vp-p/75Ω), PAL / NTSC
 More than 50dB
 Color: 0.05Lux@F1.4; B/W: 0.005Lux@F1.4
 4.7mm~94mm
 Auto / Manual
 Auto, ATW, Indoor, Outdoor, Manual
 10mm~ 1000mm
 H: 54.1° ~ 3.2°
 1/1 ~ 1/30,000s
 Auto / Manual
 BLC / HLC / DWDR
 20x
 16x
 0° ~ 360° endless, Pan Speed: 0.1° ~ 300°/sec
 -2° ~ 90°, auto flip 180°, Tilt Speed: 0.1° ~ 150°/sec
 255
 Pan: 300° /s; Tilt: 200° /s
 Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
 Up to 24 areas
 Auto restore to previous PTZ and lens status after power failure
 Auto activation of Preset/Pan/Scan/Tour/Pattern by preset-time
 Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
 Auto(ICR) / Color / B/W
 H.264 / MJPEG
 Main Stream: 25/30fps@1.3MP, Sub Stream: 25/30fps@D1/CIF
 G.711a / G.711u(32kbps)/ PCM(128kbps)
 1/1 channel In/Out

 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF Profile S



CP- UNP-2013S
1.3MP HD IP PTZ Camera

Feature

Alarm
Max Remote Users
Operating Temperature
Memory Slot
Smart Phone
Weather Proof Standard
Dimension
Weight
Power Source
Power Consumption

Specification

2/1 channel In/Out
20 users
-40°C ~ 60°C / Less than 90% RH
Micro SD, Max 64GB
iPhone, iPad, Android, Windows Phone
IP66 & IK10 Optional
Φ211.9(mm) x 322.1(mm)
6.8 kg
AC 24V/2.2A(±10%)
9.5W,21W(Heater On)