

DH-DVR3104/3108/3116

4/8/16 Channel Entry-level Mini 1U Standalone DVR



DH-DVR3104: 4 channel video inputs, 2 channel audio inputs. It can support CIF realtime recording or D1(4CIF) recording with 6/7fps. It can support TV, VGA, USB2.0.

DH-DVR3108: 8 channel video inputs, 4 channel audio inputs. It can support CIF realtime recording or D1(4CIF) recording with 6/7fps. It can support TV, VGA, USB2.0.

DH-DVR3116: 16 channel video inputs, 4 channel audio inputs. It can support CIF realtime recording or D1(4CIF) recording with 6/7fps. It can support TV, VGA, USB2.0.

Features

- > 4/8/16 channel CIF entry level mini 1U standalone DVR
- > Up to 4/8/16 cameras with SXGA(1280×1024) display
- > H.264 dual-stream video compression
- > VGA / TV synchronous video output
- > Live, recording, playback, backup & remote access
- > All channel simultaneous realtime playback
- > Smart video detection: MD, camera blank, video loss
- > 3D intelligent positioning with Dahua PTZ dome camera
- > Easy backup: USB devices, network download
- > Support 1 SATA HDD, 2 USB2.0
- > Built-in web server, multi-DVR client, DMSS & CMS

DH-DVR3104/3108/3116


Specifications

Model	DH-DVR3104	DH-DVR3108	DH-DVR3116
System			
Main Processor	High performance embedded microprocessor		
Operating System	Embedded LINUX		
System Resources	Pentaplex function: live, recording, playback, backup & remote access		
Control Mode	Front panel, USB mouse, IR remote control, Keyboard, Network		
Video			
Input	4 channel, BNC(1.0Vp-p, 75Ω)	8 channel, BNC(1.0Vp-p, 75Ω)	16 channel, BNC(1.0Vp-p, 75Ω)
Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)		
Output	1 VGA, 1 TV, BNC(1.0Vp-p, 75Ω)		
Audio			
Input	2 channel, RCA(200-2800mV, 30KΩ)	4 channel, RCA(200-2800mV, 30KΩ)	4 channel, RCA(200-2800mV, 30KΩ)
Output	1 channel, BNC(200-3000mV, 5KΩ)		
Bidirectional Talk	Same with audio input channel 1		
Display			
Display Split	1/4	1/4/8/9	1/4/8/9/16
Resolution	1280×1024, 1280×720, 1024×768, 800×600		
Tour Display	Support		
Privacy Masking	4 self-defined four-sided zones for privacy masking for each camera		
OSD	Camera title, time, video loss, camera lock, motion detection, recording		
Recording			
Video/Audio Compression	H.264 / G.711		
Image Resolution	D1/4CIF(704×576/704×480) / CIF(352×288/352×240) / QCIF(176×144/176×120)		
Encoding Speed	Main Stream: D1(1~6/7fps)/CIF(1~25/30fps)		
	Extra Stream: QCIF(1~25/30fps)		
Bit Rate	32~2048Kb/s		
Image Quality	1~6 level(level 6 is the best, VBR effectively)		
Recording Mode	Manual, Schedule(Regular(Continuous), MD(Video detection: Motion detection, Camera blank, Video loss)), Stop		
Recording Priority	Manual > MD > Regular		
Recording Interval	1~120 min. (default: 60 min.), Pre-record: 1~30 sec., Post-record: 10~300 sec.		
Video Detection			
Trigger Events	Recording, PTZ movement, Tour, Email		
Motion Detection	Zones: 396(22×18), Sensitivity: 1~6 (level 6 is highest)		
Video Loss & Camera Blank	Support		
Playback & Backup			
Playback Channel	1/2/4/All		
Search Mode	Time/Date, MD & Exact search (accurate to second)		

DH-DVR3104/3108/3116


Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom(any size)
Backup Mode	Flash drive / USB HDD / USB CD&DVD-RW / Network download
Network	
Ethernet	RJ-45 port (10/100M)
Network Functions	HTTP, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server
Remote Operation	Monitor, PTZ control, Playback, System setting, File download, Log information
Hard Disk	
Hard Disk	1 SATA port, Max 2TB HDD supported
Space Occupation	Audio: 28.8MB/H, Video: 56~500MB/H
HDD Management	Hard disk hibernation technology, HDD faulty alarm
Auxiliary Interface	
USB Interface	2 ports, 1 for mouse control, 1 for backup
RS485	PTZ control
Environmental	
Power Supply	DC12V/2A
Power Consumption	10W(without HDD)
Working Environment	-10 ~+55°C / 10~90%RH / 86~106kpa
Dimension	Mini 1U, 325mm×245mm×45mm(W×D×H)
Weight	1.5KG(without HDD)

System Connection

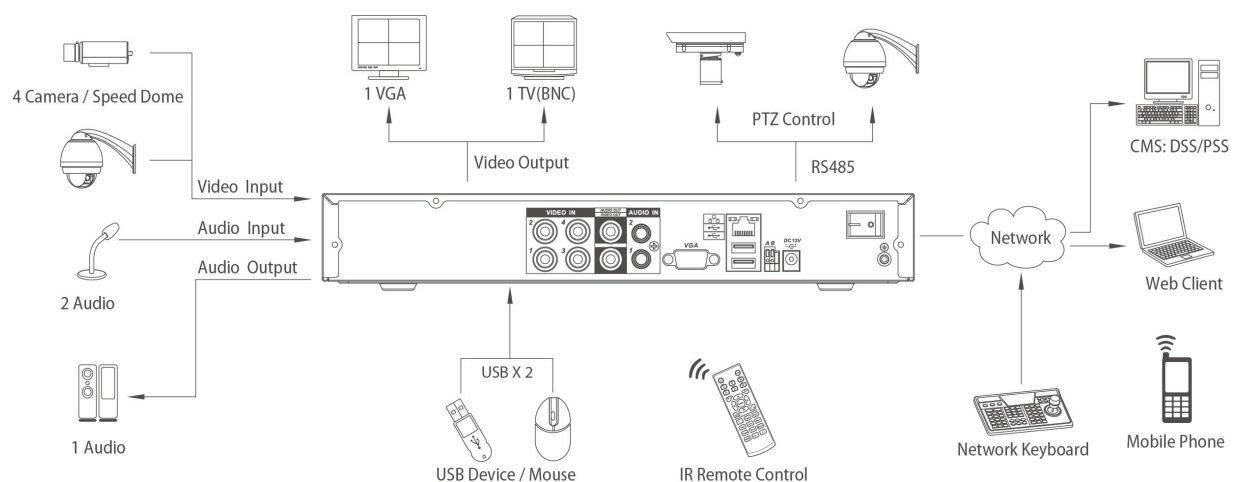


DVR3104 System Connection

DH-DVR3104/3108/3116

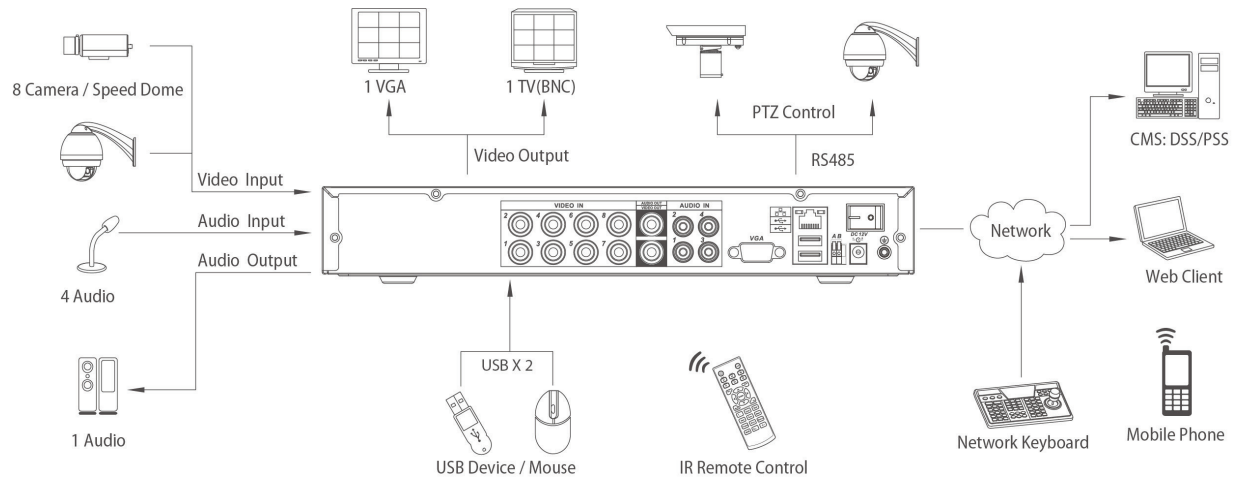

DVR3108 System Connection

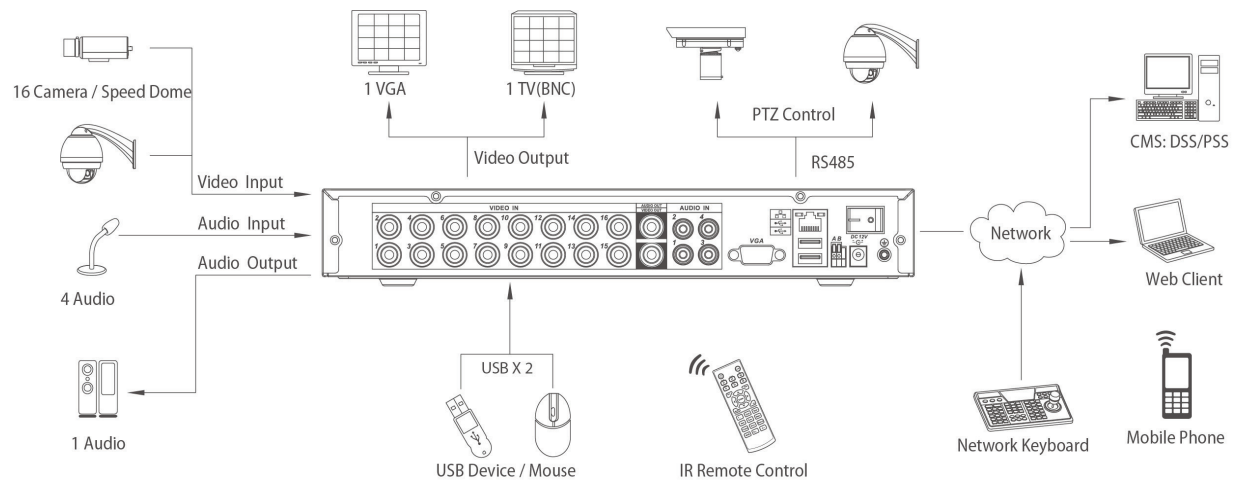

DVR3116 System Connection

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2011 Dahua Technology Co., Ltd.