

Remote Indicator CIR301



CIR301 remote indicator

Overview

The CIR301 conventional remote indicator is designed to provide discreet remote indication for use with Menvier conventional detectors.

The remote indicator is ideal for applications such as void spaces or outside locked or inaccessible rooms to provide indication of the activation of an automatic detector.

Features


- Quick and simple to install
- Wide viewing angle high brightness LED
- Attractive styling

Benefits

- High profile LED
- Fits onto standard single gang back box

Conventional Remote Indicator - CIR301

Dimensions





H (mm) W (mm) D (mm)
87 87 30

Technical Specification


Code	CIR301
Description	Remote indicator
Environmental	
Operating Temperature	-10°C to +55°C
Humidity (Non Condensing)	0 to 95% RH
Physical	
Construction	ABS
Colour	White
Lens Colour	Red
Dimensions (H x W x D)	87mm x 87mm x 30mm
Weight	0.28kg
Ingress Protection	IP30
Compatibility	
Suitable for use with	Menvier conventional fire systems

Standard Connection

CIR301

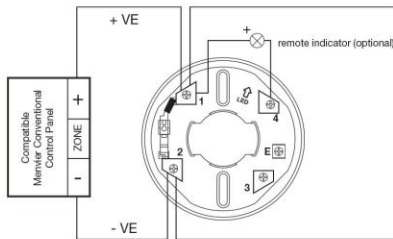

WARNING:
Do NOT use high voltage testers if ANY equipment is connected to the system.



Installation

1. Mounting plate fixes to single gang back box or can be direct fixed to wall or ceiling.
2. Cable entry is normally from rear but breakouts are provided in side of base plate.
3. Cables connect to terminals on PCB within base plate.
4. Front cover is pushed onto base plate and locks in place.

System Functionality

1. The remote indicator is connected to an individual detector.
2. The remote indicator activates if detector is triggered.
3. LED cancels when detector is reset.
4. Low current consumption.

Product Codes

Code	Description
CIR301	Conventional remote indicator
M1R195B	Conventional remote indicator (with buzzer)