


CP- UVP-1213T

1 MP 720P HDCVI PTZ Camera

CP PLUS
CORAL

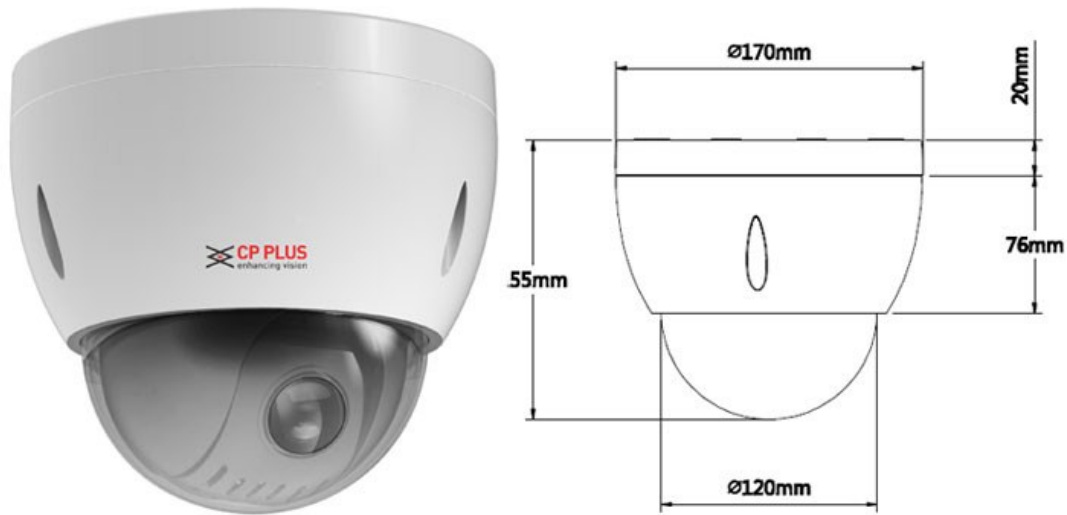

Main Features

- 1/3" Exmor HQIS Pro
- Powerful 12x Optical and 16x Digital zoom
- DWDR, Day/Night(ICR), Ultra DNR
- Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
- Max 300°/s pan speed, 360° endless pan rotation
- Built-in 2/1 alarm in/out, IP66
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



CP- UVP-1213T

1 MP 720P HDCVI PTZ Camera

Feature

Image Sensor
 Effective Pixels
 Video Output
 S/N Ratio
 Minimum Illumination
 Focal Length
 White Balance
 Focus Control
 Close Focus Distance
 Angle of View
 Electronic Shutter
 AGC control
 Back Light Compensation
 Optical Zoom
 Digital Zoom
 Pan Travel
 Tilt Travel
 Presets
 Preset Speed
 Privacy Masking
 Special Features
 Power up Action
 Idle Motion
 Time Task
 Day/Night: IR Cut Filter
 Video Compression
 Video Streaming
 Audio Compression
 Audio Streaming
 Protocols
 Alarm
 Operating Temperature

Specification

1/3" Exmor HQIS Pro
 1280(H) x 960(V)
 1 channel BNC HDCVI high definition video output
 More than 55dB
 Color: 0.05 Lux/F1.6, B/W: 0.005Lux/F1.6
 5.1mm~61.2mm
 Auto, ATW, Indoor, Outdoor, Manual
 Auto / Manual
 100mm~ 1000mm
 51.3° ~ 4.64°
 1/1 ~ 1/30,000s
 Auto / Manual
 BLC / HLC / DWDR
 12x
 16x
 360° endless, Pan Speed: 0.1° ~ 300°/sec
 -2° ~ 90°, Tilt Speed: 0.1° ~ 120°/sec
 255
 Pan: 300° /s; Tilt: 200° /s
 Up to 24 areas
 Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
 Auto restore to previous PTZ and lens status after power failure
 Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
 Auto activation of Prese/Pan/Scan/Tour/Pattern by preset-time
 Auto(ICR) / Color / B/W
 H.264 / MJPEG
 25/30fps@720P
 G.711a / G.711u(32kbps)/ PCM(128kbps)
 1 channel In
 Pello-P/D (Auto recognition)
 2/1 channel In/Out
 -10°C ~ 60°C / Less than 90% RH

CP- UVP-1213T

1 MP 720P HDCVI PTZ Camera

Feature

Weather Proof Standard

Dimension

Weight

Power Source

Power Consumption

Specification

IP66

Φ170mm×155mm

1.8Kg

AC24V/1.5A (±10%)

10W